



DOWN LIGHT

Indoor Light | Moisture Proof



Moisture Proof Ecoluxon

ELX-ECDL-MPF




3.000K 4.000K 5.000K 6.000K


■ Specification

Daya (W)	Input Voltage	Frequency Amp	LED Efikasi	Total Lumen	CRI	Temperatur Warna	Proteksi	Berat	Material
14W	AC220-240V	50/60Hz	70Lm/W	980Lm	>80Ra	3000K/6000K	IP65	560gr	Aluminium + Glass
18W	AC220-240V	50/60Hz	70Lm/W	1.260Lm	>80Ra	3000K/6000K	IP65	700gr	Aluminium + Glass
24W	AC220-240V	50/60Hz	70Lm/W	1.680Lm	>80Ra	3000K/6000K	IP65	900gr	Aluminium + Glass


Model : ELX-ECDL-MPF-14W

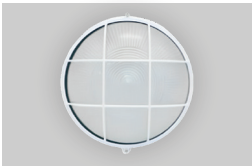


Dimension (mm)

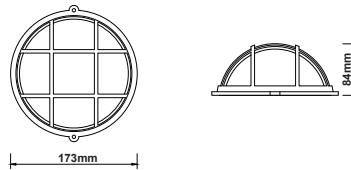


Light Distribution Curve




Model : ELX-ECDL-MPF-18W

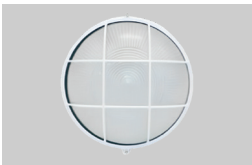

Dimension (mm)

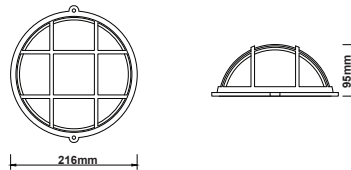


Light Distribution Curve




Model : ELX-ECDL-MPF-24W



Dimension (mm)

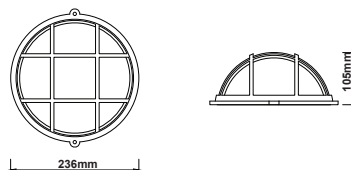

Light Distribution Curve



- * Easy maintenance
- Modular LED for easy replacement
- Opening and closing possible of LED module part and power supply part
- Customizable beam angle
- Temperature max 50°

